


## WELD-IN, LEAK PROOF

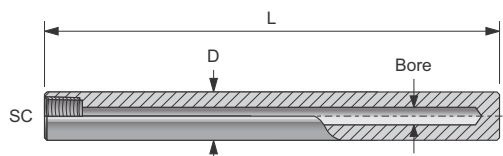

Standard Material : SS304 / SS316

SC : 1/2" BSP/NPSM

L : 50 / 100 / 150... upto 1200mm

Bore : 6.5mm for 6mm dia sensors

D : 16mm for 1/4" BSP/NPT, 25mm for 1/2" BSP/NPT,

Other threads, lengths, sizes, materials on request

### ORDER CODE

TBR400 — C — 16 — 6.5 — 145 — G12 — X

MODEL

OTHER

#### WELL MATERIAL

CODE	MATERIAL
A	SS304
B	Inconel 600
B1	Inconel 601
B4	Inconel 690
C	SS316
CL	SS316L
D	SS310
E	SS446
F	Carboon steel
BR	Brass
Q	Monel
T	Titanium
U6	Hastalloy C276
U2	Hastalloy C22
X	Other Materials

#### PROCESS CONNECTION

CODE	THREAD
G14	1/4" BSPP
G12	1/2" BSPP
G34	3/4" BSPP
G25	1" BSPP
G38	1 1/2" BSPP
R12	1/2" BSPT
R34	3/4" BSPT
N14	1/4" NPT/NPSM
N12	1/2" NPT/NPSM
N34	3/4" NPT/NPSM
N25	1" NPT/NPSM
N38	1 1/2" NPT/NPSM
M20	M20 x 2.5
M27	M27 x 2
M33	M33 x 2

SHANK OD 'D'

TOTAL LENGTH 'L'

BORE

Abbreviations : SC - Sensor Connection, L - Total Length, D - Outer Diameter

All dimensions are in mm, unless otherwise specified.



Tel : +91 22 41929999 / 42537777

Email : sensors@radix.co.in • www.radix.co.in